



Canon Digital IXUS 750 1/1.8" Compact camera 7,1 MP CCD 3072 x 2304 pixels Silver

Brand : Canon

Product family: Digital IXUS

Product code: 0798B005

Product name : 750




Digital IXUS 750 Silver

Canon Digital IXUS 750. Camera type: Compact camera, Megapixel: 7,1 MP, Image sensor size: 1/1.8", Sensor type: CCD, Maximum image resolution: 3072 x 2304 pixels. Optical zoom: 3x, Digital zoom: 4x, Focal length range: 7.7 - 23.1 mm. Maximum video resolution: 640 x 480 pixels. Display diagonal: 6,35 cm (2.5"). Viewfinder type: Optical. PictBridge. Weight: 170 g. Product colour: Silver

Picture quality		Camera	
Image sensor size *	1/1.8"	Shooting modes *	Auto, Manual, Movie
Camera type *	Compact camera	Playback zoom (max)	2x
Megapixel *	7,1 MP	Design	
Sensor type *	CCD	Product colour *	Silver
Maximum image resolution *	3072 x 2304 pixels	Battery	
Still image resolution(s) *	640 x 480,1600 x 1200,2048 x 1536,2592 x 1944,3072 x 2304	Battery technology *	Lithium-Ion (Li-Ion)
Supported aspect ratios	4:3	Battery type	NB-3L
Lens system		System requirements	
Optical zoom *	3x	Mac compatibility	✓
Digital zoom *	4x	Operational conditions	
Focal length range	7.7 - 23.1 mm	Recommended operating temperature range (T-T)	0 - 40 °C
Filter	Primary Colour	Operating relative humidity (H-H)	10 - 90%
Focusing		Weight & dimensions	
Focus *	TTL	Width	89,5 mm
Exposure		Depth	57 mm
ISO sensitivity	50, 100, 200, 400, Auto	Height	27,4 mm
Flash		Weight	170 g
Flash modes *	Auto, Red-eye reduction	Packaging content	
Video		Bundled software	ZoomBrowser EX/ImageBrowser PhotoStitch ArcSoft PhotoStudio Drivers
Video recording *	✓	Other features	
Maximum video resolution *	640 x 480 pixels	Video capability	✓
Motion JPEG frame rate	30 fps	Effective sensor resolution	7100000 pixels
Memory		Interface	USB 2.0
Compatible memory cards *	mmc, sd	Data compression	Superfine, Fine, Normal
Display		Metering	Evaluative, Centre-weighted Average, Spot
Display *	LCD	Lens system	7/5
Display diagonal *	6,35 cm (2.5")	Built-in flash	✓
Display resolution (numeric)	115000 pixels	Camera shutter speed	15 - 1/2000 s
Viewfinder		Focal length (35mm film equivalent)	37 - 111 mm
Viewfinder type	Optical	Memory type	Flash
Ports & interfaces		Compatible operating systems	Windows 98SE/Me/2000/XP OS X v10.2 - 10.3
I/O ports	USB (Mini-B, PTP) A/V output (PAL/NTSC)	Digital SLR	✗
PictBridge *	✓		

Catalog Object Cloud

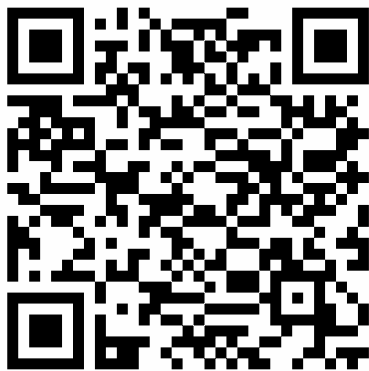

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.