



HP LP2475w 24-inch Widescreen LCD Monitor computer monitor 61 cm (24") Black

Brand : HP

Product code: KD911AT

Product name : LP2475w 24-inch Widescreen LCD Monitor

LP2475w 24-inch Widescreen LCD Monitor, 1920 x 1200, 1000:1, 6 ms
HP LP2475w 24-inch Widescreen LCD Monitor. Display diagonal: 61 cm (24"). Display: LCD. Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. USB hub version: 2.0. Product colour: Black



Display		Packaging data	
Surface treatment	S-IPS	Package weight	12 kg
Display diagonal *	61 cm (24")	Packaging content	
Touchscreen *	✗	HP Display Assistant is a software utility that enables theft deterrence and allows monitor adjustment, color calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected PC; HP Display LiteSaver allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor; Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese	
Display brightness (typical)	400 cd/m²		
Contrast ratio (typical) *	1000:1		
Viewing angle, horizontal	178°		
Viewing angle, vertical	178°		
Pixel pitch	0,270 x 0,270 mm		
Horizontal scan range	30 - 94 kHz		
Vertical scan range	48 - 85 Hz		
Display scanning frequency	Horizontal frequency: 30-94 kHz, Vertical frequency: 48-85 Hz		
Multimedia			Bundled software
Built-in speaker(s) *	✗		
Built-in camera *	✗		
Design			
Product colour *	Black		
Ports & interfaces			
I/O ports	USB 2.0 Hub: self-powered, six ports (cable included)		
USB hub version	2.0		
USB Type-A downstream ports quantity	6		
HDMI ports quantity	1		
Composite video in	1		
Component video (YPbPr/YCbCr) in	1		
Ergonomics			
Panel mounting interface	100 x 100 mm	Sustainability	
		Sustainability certificates	ENERGY STAR
		Other features	
		Country of origin	China
		Display	LCD
		Audio system	No audio included at platform level

Ergonomics		Other features	
Plug and Play	✓	TV tuner integrated	✗
Display tilt and swivel range	Tilt range: -5° to + 30° vertical tilt, swivel range: -45° to +45°, height adjust: 100 mm, pivot rotation	Package dimensions (WxDxH)	672 x 464 x 352 mm
		Power requirements	100 to 240 VAC, 50 to 60 Hz
Power			Preset VESA Graphic Modes (non-interlaced): 640 x 480 @ 60 Hz and 75 Hz, 800 x 600 @ 60 Hz and 75 Hz, 1024 x 768 @ 60 Hz, 75 Hz, and 85 Hz, 1152 x 900 @ 65 Hz, 1280 x 768 @ 60 Hz, 1280 x 900 @ 60 Hz, 1280 x 1024 @ 60 Hz, 75 Hz and 85 Hz, 1600 x 1000 @ 60 Hz, 1600 x 1200 @ 60 Hz, 1680 x 1050 @ 60 Hz, 1920 x 1080 @ 60 Hz; 1920 x 1200 @ 60 Hz; Text Mode: 720 x 400 @ 70 Hz; Mac Mode: 1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz; Sun Mode: 1152 x 900 @ 66 Hz
Power consumption (off)	2 W		
Operational conditions			
Operating temperature (T-T)	5 - 35 °C	Recommended resolution	Preset VESA Graphic Modes (non-interlaced): 640 x 480 @ 60 Hz and 75 Hz, 800 x 600 @ 60 Hz and 75 Hz, 1024 x 768 @ 60 Hz, 75 Hz, and 85 Hz, 1152 x 900 @ 65 Hz, 1280 x 768 @ 60 Hz, 1280 x 900 @ 60 Hz, 1280 x 1024 @ 60 Hz, 75 Hz and 85 Hz, 1600 x 1000 @ 60 Hz, 1600 x 1200 @ 60 Hz, 1680 x 1050 @ 60 Hz, 1920 x 1080 @ 60 Hz; 1920 x 1200 @ 60 Hz; Text Mode: 720 x 400 @ 70 Hz; Mac Mode: 1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz; Sun Mode: 1152 x 900 @ 66 Hz
Storage temperature (T-T)	20 - 60 °C		
Operating relative humidity (H-H)	20 - 80%		
Storage relative humidity (H-H)	5 - 95%		
Non-operating relative humidity (non-condensing)	5 - 90%		
Relative humidity	20 - 80%		
Weight & dimensions			
Width (with stand)	556 mm	Display resolution at frequency	Preset VESA Graphic Modes (non-interlaced): 640 x 480 @ 60 Hz and 75 Hz, 800 x 600 @ 60 Hz and 75 Hz, 1024 x 768 @ 60 Hz, 75 Hz, and 85 Hz, 1152 x 900 @ 65 Hz, 1280 x 768 @ 60 Hz, 1280 x 900 @ 60 Hz, 1280 x 1024 @ 60 Hz, 75 Hz and 85 Hz, 1600 x 1000 @ 60 Hz, 1600 x 1200 @ 60 Hz, 1680 x 1050 @ 60 Hz, 1920 x 1080 @ 60 Hz; 1920 x 1200 @ 60 Hz; Text Mode: 720 x 400 @ 70 Hz; Mac Mode: 1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz; Sun Mode: 1152 x 900 @ 66 Hz
Depth (with stand)	253 mm		
Height (with stand)	521 mm		
Width (without stand)	556 mm		
Depth (without stand)	83 mm		
Height (without stand)	362 mm		
Weight (without stand)	9,1 kg		
		Display video input type connector	DVI-I (2), HDMI, DisplayPort, Component Video, S-Video and Composite Video
		Audio included	No audio included at platform level
		Security features	Kensington Lock-ready
			Optional HP Silver LCD Speaker Bar: powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP LCD monitors. Features include dual speakers with full sound range and external jack for headphones, part number EE418AA. For more information, refer to the product's Quick Specs. Optional Kensington Security Lock: combines aircraft-grade steel and Kevlar fiber to securely lock down your monitor and help prevent theft, part number PC766A. For more information, refer to the product's Quick Specs
		Multimedia	Power on/off; 3-button OSD (menu, plus, minus); function, input Brightness, contrast, positioning, color temperature (6500k, 9300k, custom), individual color control, serial number, display, clock, clock phase, monitor management, factory reset
		User controls	
		Video Dot Rate	205 MHz

Other features	
Multimedia connections	Optional HP Silver LCD Speaker Bar: powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP LCD monitors. Features include dual speakers with full sound range and external jack for headphones, part number EE418AA. For more information, refer to the product's Quick Specs. Optional Kensington Security Lock: combines aircraft-grade steel and Kevlar fiber to securely lock down your monitor and help prevent theft, part number PC766A. For more information, refer to the product's Quick Specs
Product dimensions (with stand, imperial)	556,3 x 253 x 421,6 mm (21.9 x 9.96 x 16.6")
Certification	TCO'99, ISO 13406-2 VDT Guidelines Approval, CISPR Requirements, VCCI Approvals, MIC (Korean) Requirements, CSA, Australian ACA Approval, "GS" Mark, TUV Approvals, CE Marking, FCC Approval, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, Microsoft Windows XP, and Windows Vista Premium)
Thin Client	
Processor frequency	2 GHz



0883585765461




883585765461



0883585765454



883585765454

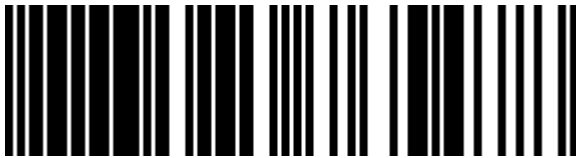

0883585765478



883585765478



0883585765485



883585765485

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.